
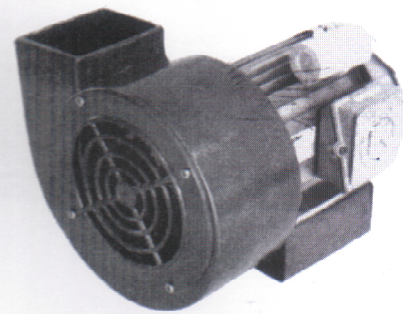
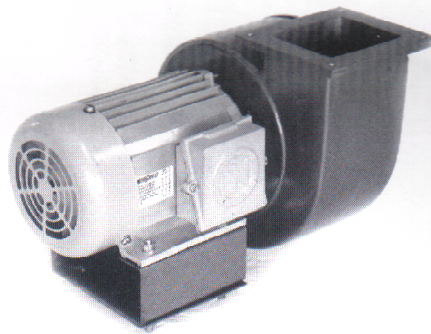





VENTILADOR SIROCO

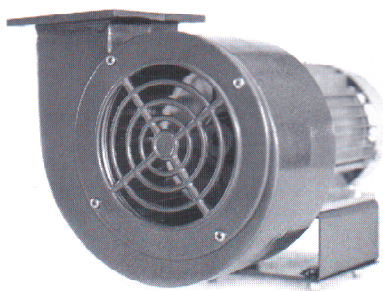

- ✓ Motores IP.21/55/56
- ✓ Isolação classe B/F/H
- ✓ Caracol em alumínio fundido
- ✓ Rotor em aço carbono

POSIÇÃO DE MONTAGEM

Vista da entrada de ar



DIMENSÕES

Modelo	A	B	C	D	E	F	G	H	I	J	Furação Flange
VSRFCC-95	150	—	170	190	75	60	100	110	220	95	78 X 90
VSRF 95	150	—	170	205	75	60	100	110	220	95	78 X 90
VSRF 115	200	175	220	265	75	60	110	120	290	120	85 X 95
VSRF 147	205	170	240	280	85	65	115	130	300	150	90 X 104
VSRF 167	255	210	300	330	90	85	150	150	335	175	127 X 127
VSRF 198	330	290	350	400	104	104	153	153	382	205	125 X 125
VSRF 232	455	—	440	460	125	130	210	205	430	250	170 X 170
VSRF 384	545	—	615	650	210	300	385	295	690	390	—

DADOS TÉCNICOS

Modelo	Vazão m³/min.	Pressão mm/CA	HZ	Nível Ruído dBA	Tensão (V)	Potência (CV) (W)	Corrente (A)	RPM	Proteção Motor	KG
VSRFCC-95	5.8	11	60	71	12/24	60 W	5	4.000	Aberto	1.4
VSRF 95	5.4	10	60	71	110/220	50 W	4.8 / 2.0	3.500	Aberto	3.6
VSRF 115	7.3	20	60	80	110/220 220/380/440	1/4 1/3	3.4 / 1.8 1.3 / 0.77 / 0.67	3.350	IP.55 IP.56	4.5
VSRF 147	13.4	40	60	87	110/220 220/380/440	1/4 1/3	3.4 / 1.8 1.3 / 0.77 / 0.67	3.350	IP.55 IP.56	7.4
VSRF 167	24.2	80	60	88	110/220 220/380/440	1,0	14.2 / 7.10 3 / 1.7 / 1.5	3.500	IP.21 IP.55/56	16
VSRF 198	50.2	160	60	91	110/220 220/380/440	2,0	25.2 / 12.6 6.2 / 3.6 / 3.1	3.500	IP.21 IP.55/56	24
VSRF 232	80	200	60	95	220/380/440	5,0	14.9 / 8.6 / 7.45	3.500	IP.55/56	41
VSRF 384	280	190	60	87	220/380/440	12 1/2	36.6 / 21.1 / 18.3	1.700	IP.55/56	85

Sob consulta: frequência 50 HZ; 4.6.8 polos; motores a prova de explosão.
dBA - medido a 1m de distância